

## HTT104A

---

For all variants of the HTT104A

**Hardware Manual**

Revision 1.0



# Contents

- HTT104A Technical Specifications ..... 3
  - Available Headers ..... 3
  - Dimensional Drawing ..... 4
- Characteristics..... 5
  - Optical ..... 5
  - Power ..... 5
  - Environmental..... 5
- Options..... 6
  - Power Options ..... 6
- Recommended Accessories ..... 7
  - HDMI Cable ..... 7
  - USB Cable ..... 7
  - Power Adaptor ..... 7
- Support ..... 7
- Contact..... 7

## Revision History

Revision	Date	Description	Author
1.0	January 20 2018	First Release	Henry Jakl

# HTT104A Technical Specifications

The HTT104A is a 10.4" TFT display with an HDMI interface. The 1024x100 resolution offers crisp images, and video feedback, with 24-bit Full colour capabilities. The HTT can be configured with resistive, capacitive, or non-touch panels, making this display suitable for any application.

## Available Headers

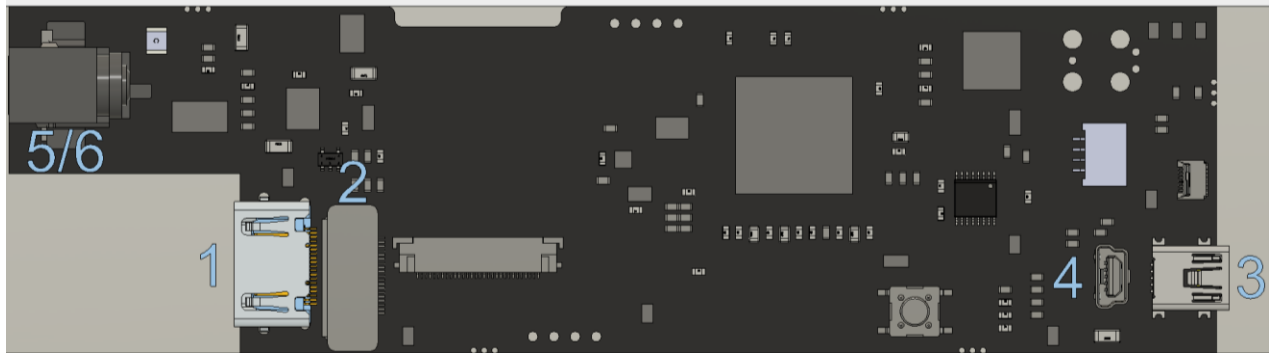


Figure 1: Headers

Table 1: Headers and Mates

#	Header	Standard Mate	Population
1	HDMI Port, Horizontal, Type A Standard	Type A Standard HDMI Cable	-H5
2	HDMI Port, Vertical, Type A Standard	Type A Standard HDMI Cable	-H6
3	Mini USB, Horizontal: Touch & Power	Mini-B USB Cable	-H5
4	Mini USB, Vertical: Touch & Power	Mini-B USB Cable	-H6
5	Barrel Jack: 2.1mm Center Positive	Power Adaptor	-H6
6	External Power, 2-1445057-2	Micro MATE-N-LOCK 1445022-2	-VPT model

# Dimensional Drawing

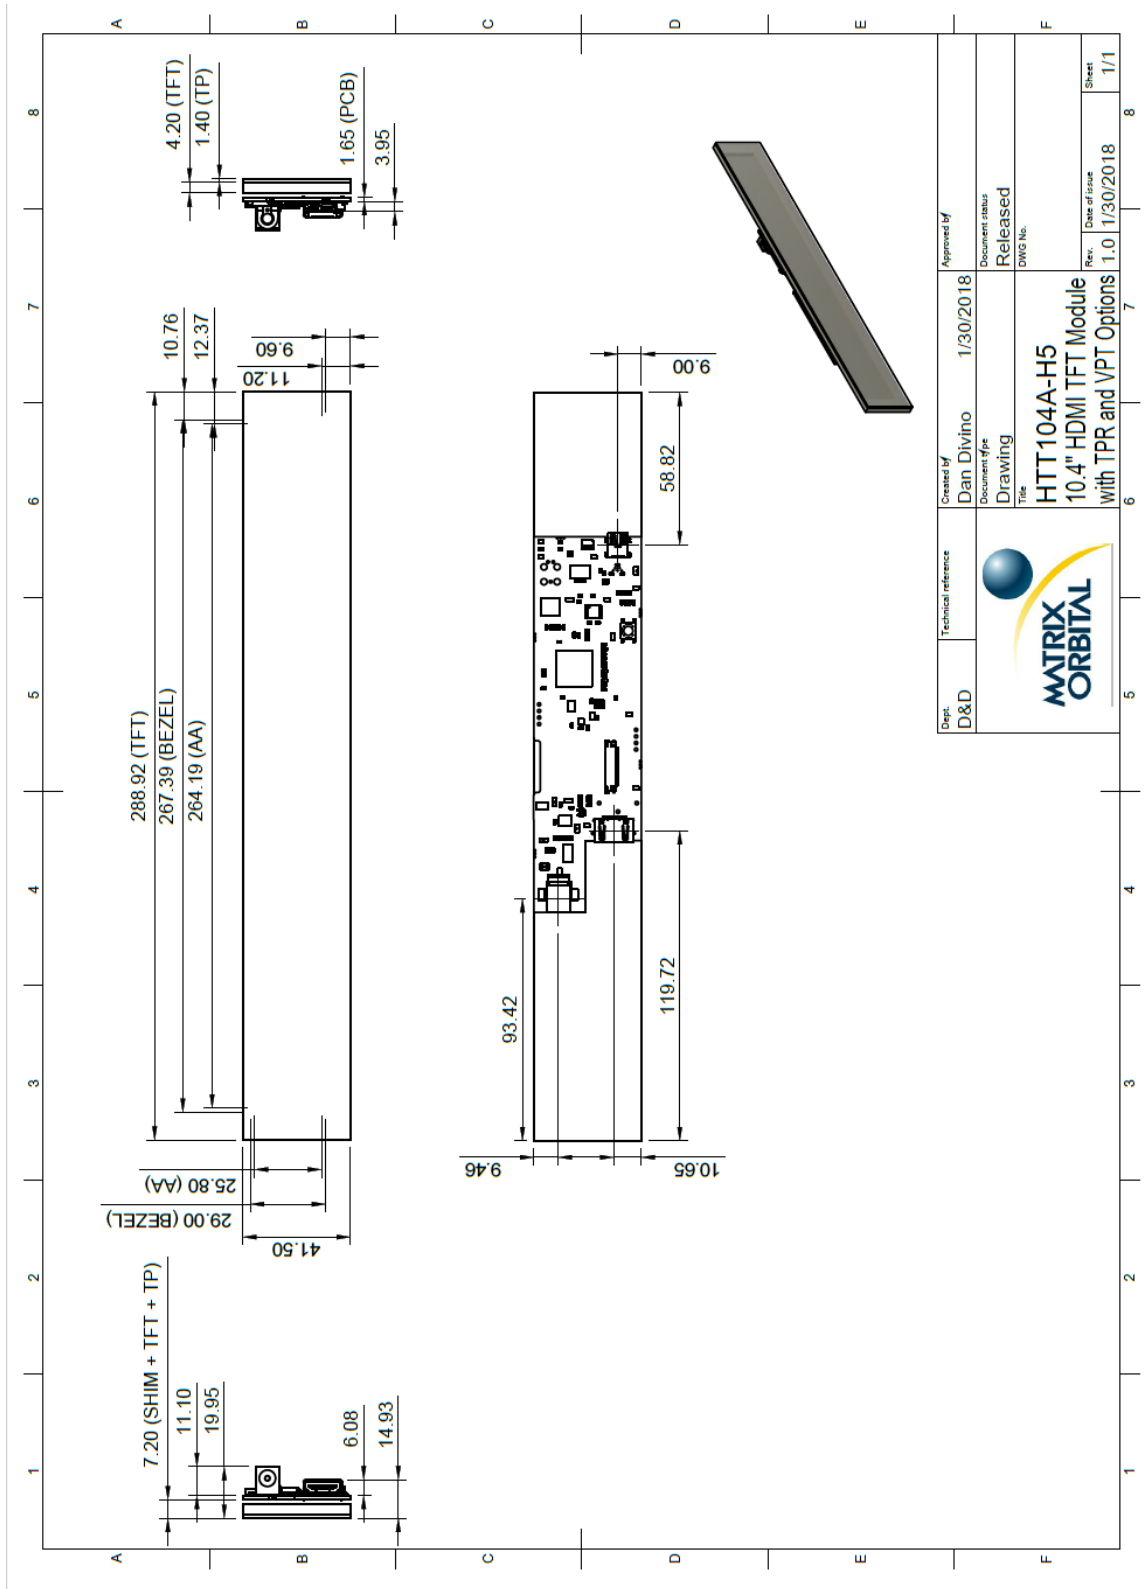


Figure 2: Dimensional Drawing

# Characteristics

## Optical

Table 2: Optical Characteristics

Module Size	288.92 x 41.5 x 13.53	mm
Viewing Area	267.39 x 29.00	mm
Active Area	264.19 x 25.80	mm
Pixel Pattern	1024 x 100 x 16bit RGB	
Pixel Pitch	0.258 x 0.258	mm
Luminance	250	cd/m <sup>2</sup>
Viewing Angle	60° Left, Right, Up 50° Down	
Contrast Ratio	300:1	
Backlight Half-Life	20,000 hours	

## Power

Table 3: Typical Power Characteristics

Parameter	Min	Typ	Max	Unit	Remarks
Logic	-	TBD	-	mA	Backlight Off
Backlight	0	-	TBD	mA	Off, Mid, Max

Table 4: Maximum Power Characteristics

Parameter	Min	Typ	Max	Unit	Remarks
Supply Voltage	4.75	5.0	5.25	V	Standard Voltage (V5)
	5.0	12.0	35.0	V	Wide Voltage (VPT)

## Environmental

Table 5: Environmental Characteristics

Operating Temperature	0°C to +50°C
Storage Temperature	-10°C to +60°C
Operating Relative Humidity*	90% (T < 40°C)

\*Note: No condensation at any temperature

## Options

Table 6: Part Numbering Scheme

HTT	104	A	-TPR	-BLM	-B0	-H5	-CH	-V5
1	2	3	4	5	6	7	8	9

Table 7: Display Options

#	Designator	Options
1	Product Type	HTT: Graphic TFT Display
2	Display Size	104: 10.4"
3	Screen Type	A: A Type
4	Touch	-TPN: No touch panel -TPR: Resistive touch panel -CTB: Bezel-less capacitive touch panel
5	Backlight	-BLS: Brightness < 300 Nit
6	Bezel	-B0: None
7	Headers	-H5: Horizontal Connectors -H6: Vertical Connectors
8	Protocol	-CH: HDMI interface
9	Voltage	-V5: 5.0V Input Voltage -VPT: Regulated 5V - 35V Input Voltage

## Power Options

Table 8: Powering Options

Option	Voltage Input
V5	USB Header
VPT	Barrel Jack/External Power Header

## Recommended Accessories

### HDMI Cable



Figure 3: HDMI Cable

**Part Number:**  
HDMI3FT or HDMI6FT

**Description:**  
3ft (1m) or 6ft (2m) HDMI Cable

### USB Cable



Figure 4: EXTMUSB3FT

**Part Number:**  
EXTMUSB3FT

**Description:**  
3ft (1m) Mini-B USB Cable

### Power Adaptor



Figure 5: PWR-ACDC-5V2A

**Part Number:**  
PWR-ACDC-5V2A

**Description:**  
9ft (2.7m) AC to DC power adapter with 2.1mm center positive barrel jack.

Input Voltage: 100-240V AC  
Output Voltage: 5V DC @ 2A

AC Plugs Included: North American (NEMA), Europlug (Type C), UK (Type G), Australia/China/New Zealand/Argentina (Type I)

## Support

Phone: 403.229.2737

Email: [support@matrixorbital.ca](mailto:support@matrixorbital.ca)

Manuals and Drivers: <http://www.matrixorbital.ca>

Forums: <http://www.lcdforums.com/forums>

## Contact

### Sales

Phone: 403.229.2737

Email: [sales@matrixorbital.ca](mailto:sales@matrixorbital.ca)

### Support

Phone: 403.229.2737

Email: [support@matrixorbital.ca](mailto:support@matrixorbital.ca)

### Online

Purchasing: [www.matrixorbital.com](http://www.matrixorbital.com)

Support: [www.matrixorbital.ca](http://www.matrixorbital.ca)